



1. TOP HINGE ASSEMBLY
 2. BOTTOM HINGE ASSEMBLY
 3. ALUMINUM COVER PANEL
 4. 9" WIDE x 14" HIGH CLEAR SAFETY ACRYLIC WINDOW
 5. 18 ga. STEEL KICK PLATES (SEE OPTIONS)
 6. 3/4" THICK EXTERIOR GRADE PLYWOOD TRIM
 7. GALVANIZED OR STAINLESS STEEL FRAME
- *** RECOMMENDED FRAMING REQUIREMENTS:
1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION.

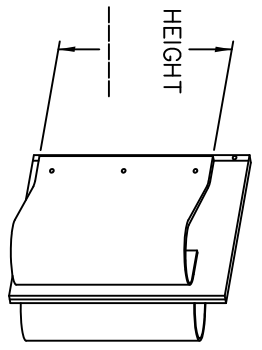

SPRING BUMPER

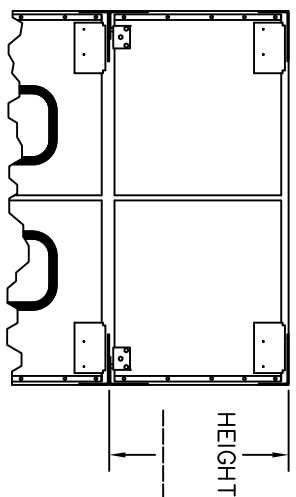

DOUBLE DUTCH

DOOR OPENING:

_____ W _____ H

QUANTITY: _____

- DOUBLE
- SINGLE
 - LEFT
 - RIGHT

GASKETED (SS1G & SS3G)

NON-GASKETED (SS1 & SS3)

OPTIONS (CHECK BOX IF APPLICABLE)

- 5/16" THICK HDP SPRING BUMPER
- SELECT HEIGHT
 - 12"
 - 21"
 - 42"

NOTE: KICKPLATE REMAINS BEHIND BUMPER

- CUSTOM WINDOW DESIGN
- RECTANGULAR/SQUARE

_____ W _____ H

- ROUND - DIAMETER: _____
- 9" JAMB GUARDS

- KICK PLATES
- SELECT HEIGHT
 - 24"
 - 36"
 - 48" (STANDARD)
 - FULL HEIGHT

METAL SELECTION (FRONT/BACK)

- STAINLESS STEEL/STAINLESS STEEL (SS3)
- GALV. STEEL/GALV. STEEL (SS1)
- CART GUARD - _____ HIGH
- CHAIN LOCKING COLLAR
- DOUBLE DUTCH



SERIES 1000 - WOOD CORE DOOR
MODEL SS1 & SS3 / MODEL SS1G & SS3G

DATE: APR-19-16 SCALE: N.T.S.
DRAWN: SH DWG NO: LSS1
APPROVED: ST PART NO: N/A

S.S. QUOTE REF. # _____
CUSTOMER _____
APPROVED BY: _____
P/O No.: _____
DATE: _____