


SlowStop® Rebounding Bollard – 4” (60-5201)

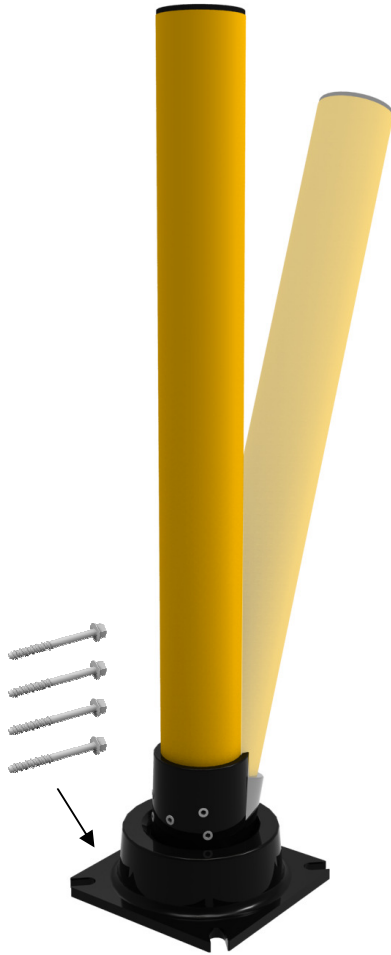

Installs with four (4) 5/8” x 5-1/2”
Concrete Screw Anchors

Color: RAL 1023 Safety Yellow Bollard
RAL 9005 Black Base

Diameter: 4” [101.6mm] (3.5” ANSI Schedule 40 Pipe)
Height: 42” [1067mm]

Set Screws: 5 M16 x 2.00
8mm Hex

Cap: Black Plastic

MASS (LBS)	1000	2000	3000	4000	5000	7500	10000	15000
SPEED (MPH)								
1	Green	Green	Green	Green	Green	Green	Green	Green
2	Green	Green	Green	Green	Green	Green	Green	Yellow
3	Green	Green	Green	Green	Green	Yellow	Yellow	Yellow
4	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red
5	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red
6	Green	Yellow	Yellow	Red	Red	Red	Red	Red
7	Green	Yellow	Red	Red	Red	Red	Red	Red
8	Yellow	Yellow	Red	Red	Red	Red	Red	Red
9	Yellow	Red	Red	Red	Red	Red	Red	Red
10	Yellow	Red	Red	Red	Red	Red	Red	Red
11	Yellow	Red	Red	Red	Red	Red	Red	Red
12	Yellow	Red	Red	Red	Red	Red	Red	Red

No / Negligible Damage
Will Stop / Potential Damage to Guard
Guard is Under-Sized

SPECIFICATIONS

- Energy Absorption: 2,667 joules / 1,967 ft-lb.
- Temperature Rating: -40°C/°F
- Pipe Coating: Galvanized + Powder
- Cast Iron Coating: Environmentally Friendly Water-Based KTL Coating plus Powder Coat C5I Rated.

RECOMMENDED USES

- Medium Duty
- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Pedestrian Safety
- Access Denial
- Fuel Pump and Utility Protection
- Post-tensioned Concrete
- Not for K-Rated Security Use



Toll-Free Phone: **1-866-828-6737**

Toll-Free Fax: **1-844-899-0088**

ironguardsafety.com info@ironguardsafety.com