

HDD

Heavy Duty Dock Doors



TNR® delivers a basic rubber roll-up door for manually operated dock doors.

HARSH ENVIRONMENTS

dirt, dust, rain, snow, temperature

DOOR IMPACT CONCERNS

rugged construction withstands rough environments

HIGH WINDLOAD & PRESSURE DIFFERENTIAL

caused by exterior wind exposure & positive pressure work environments

APPLICATIONS

ideal for distribution, commercial and manufacturing applications




***Tough 'n' Ready
For Your Challenging
Environments***

HDD Heavy Duty Dock Door

The full value of having a proven rugged TNR® rubber door is clearly evident when it withstands and endures the toughest workplaces.

Mechanical Feature	Description	Benefit
Rubber Curtain Material Limited Lifetime Warranty	1/4" thick SBR rubber with polyester core weave reinforcement. Standard Black. Optional Grey, Blue EPDM rubber.	Durable, flexible and resistant to harsh environments and impacts in temperatures from -40°F to 180°F.
NEWGEN® Guide and Curtain Lok™ System Limited Lifetime Warranty	Patented curtain retention system that releases upon impact	Reliable and consistent door operation, withstand repeated impacts, quick to repair and reset, no guide gap maintenance required.
Door Size - W x H	From 8' x 8' up to 10' x 12'	Offers a lower maintenance, affordable alternative to standard sectional doors for loading dock openings.
Knock-away Bottom Bar	Double-angle design with knock-away plate and EPDM rubber loop	After impact door is easily reset with standard fasteners, large rubber loop seals to uneven floors.
Endplate & Mounting Angles	Simply designed support structures to accommodate easy and versatile installation. Self supporting steel frame.	Reduce installation cost and minimal clearances required around door opening. Reduce maintenance costs.
Self Supporting Frame	Steel mounting angles, pre-drilled and painted	Allows for quick and easy installation of door system.
Manual Chain Hoist & Counterbalance Springs	4.5:1 ratio chain hoist with 25,000 cycle rated inboard springs	Low maintenance and low cost. Provides easy manual operation of dock door.
Operator-Ready Option	Replaces chain hoist with pressure sensitive reversing edge with coil cord.	Option to accommodate installer supplied electric operator for retrofit to model HDD manual dock door.
Mechanical Options	Front/top hoods, guide guards, 16" x 16" window, vision stripe	Customize for safety and convenience

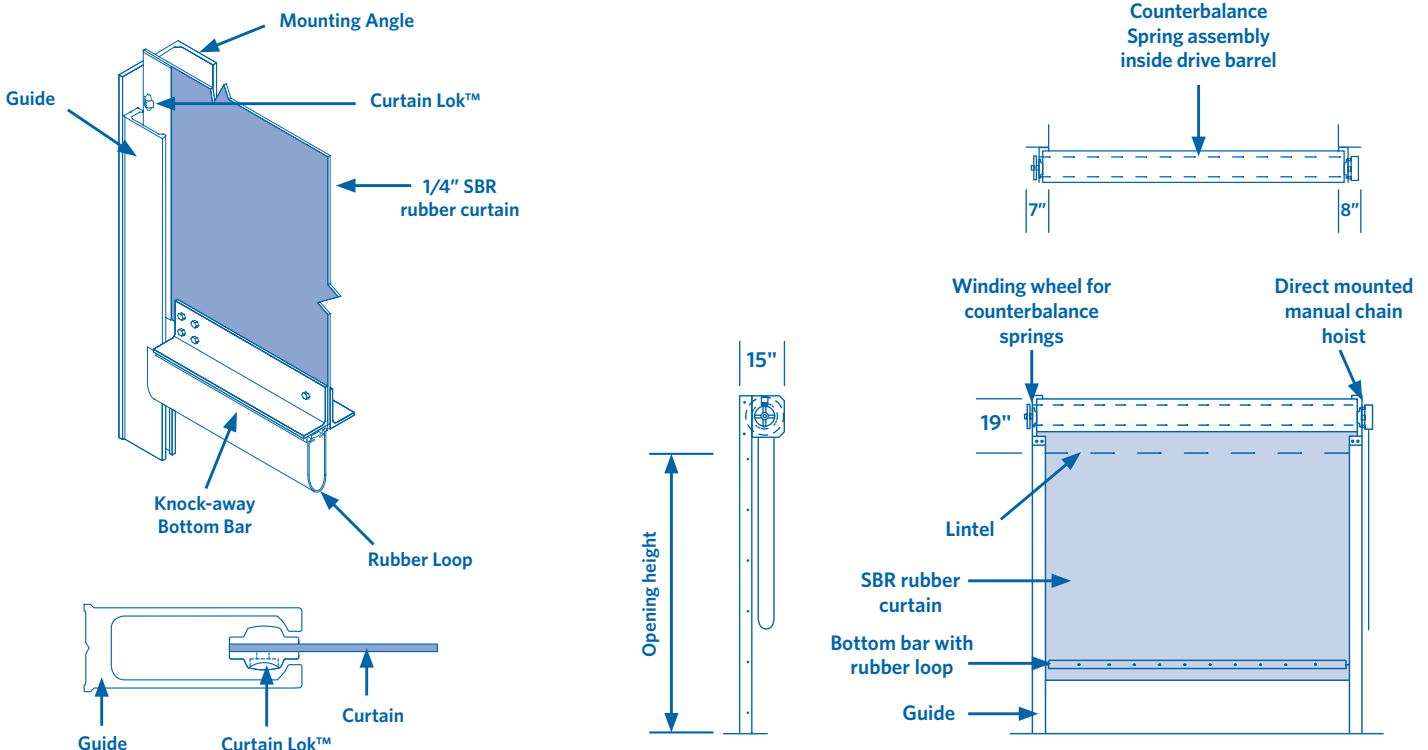

Toll-free 1-866-792-9968 Fax 1-705-735-9564 info@tnrdoors.com TNRdoors.com

